


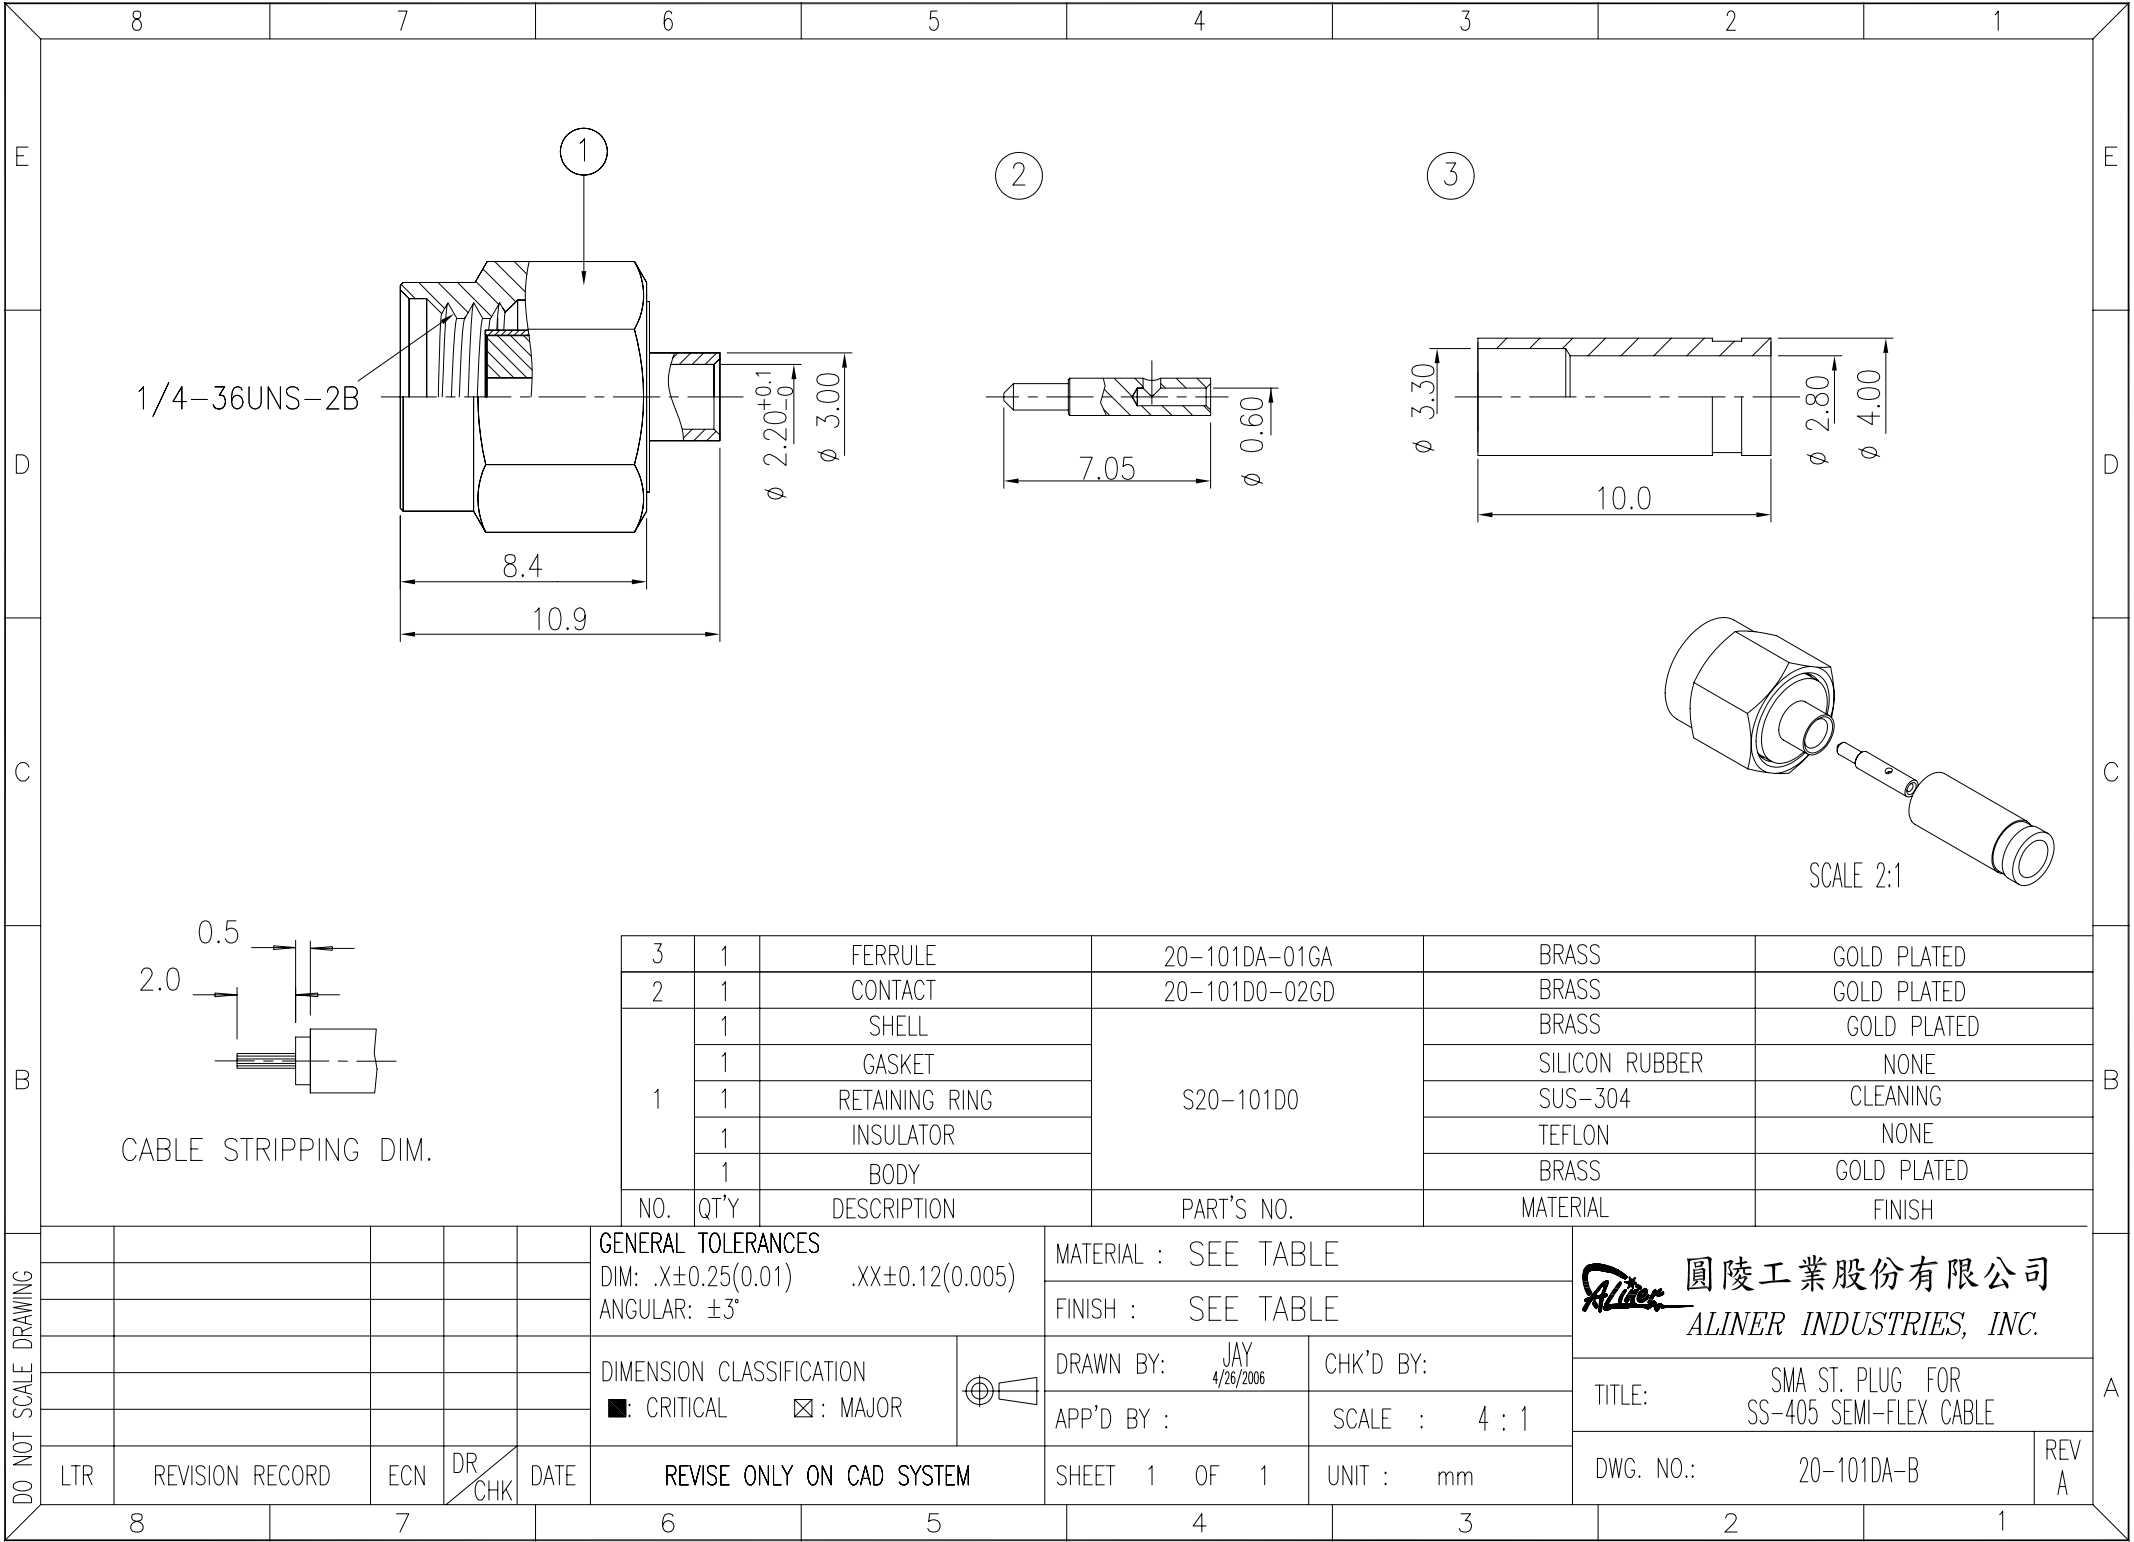

1/4-36UNS-2B

8.4

10.9

ϕ 2.20 $^{+0.1}_{-0}$

ϕ 3.00

2

7.05

ϕ 0.60


3

ϕ 3.30

10.0

ϕ 2.80

ϕ 4.00



CABLE STRIPPING DIM.

3	1	FERRULE	20-101DA-01GA	BRASS	GOLD PLATED
2	1	CONTACT	20-101D0-02GD	BRASS	GOLD PLATED
1	1	SHELL	S20-101D0	BRASS	GOLD PLATED
	1	GASKET		SILICON RUBBER	NONE
	1	RETAINING RING		SUS-304	CLEANING
	1	INSULATOR		TEFLON	NONE
	1	BODY		BRASS	GOLD PLATED
NO.	QT'Y	DESCRIPTION	PART'S NO.	MATERIAL	FINISH

GENERAL TOLERANCES
DIM: .X $\pm$ 0.25(0.01) .XX $\pm$ 0.12(0.005)
ANGULAR: $\pm$ 3°

DIMENSION CLASSIFICATION
■: CRITICAL ☒: MAJOR



MATERIAL : SEE TABLE

FINISH : SEE TABLE

DRAWN BY: JAY
4/26/2006

CHK'D BY:

APP'D BY :

SCALE : 4 : 1

SHEET 1 OF 1

UNIT : mm

ALINER 圓陵工業股份有限公司
ALINER INDUSTRIES, INC.

TITLE: SMA ST. PLUG FOR
SS-405 SEMI-FLEX CABLE

DWG. NO.: 20-101DA-B

REV
A

DO NOT SCALE DRAWING

LTR

REVISION RECORD

ECN

DR
CHK

DATE

REVISE ONLY ON CAD SYSTEM