


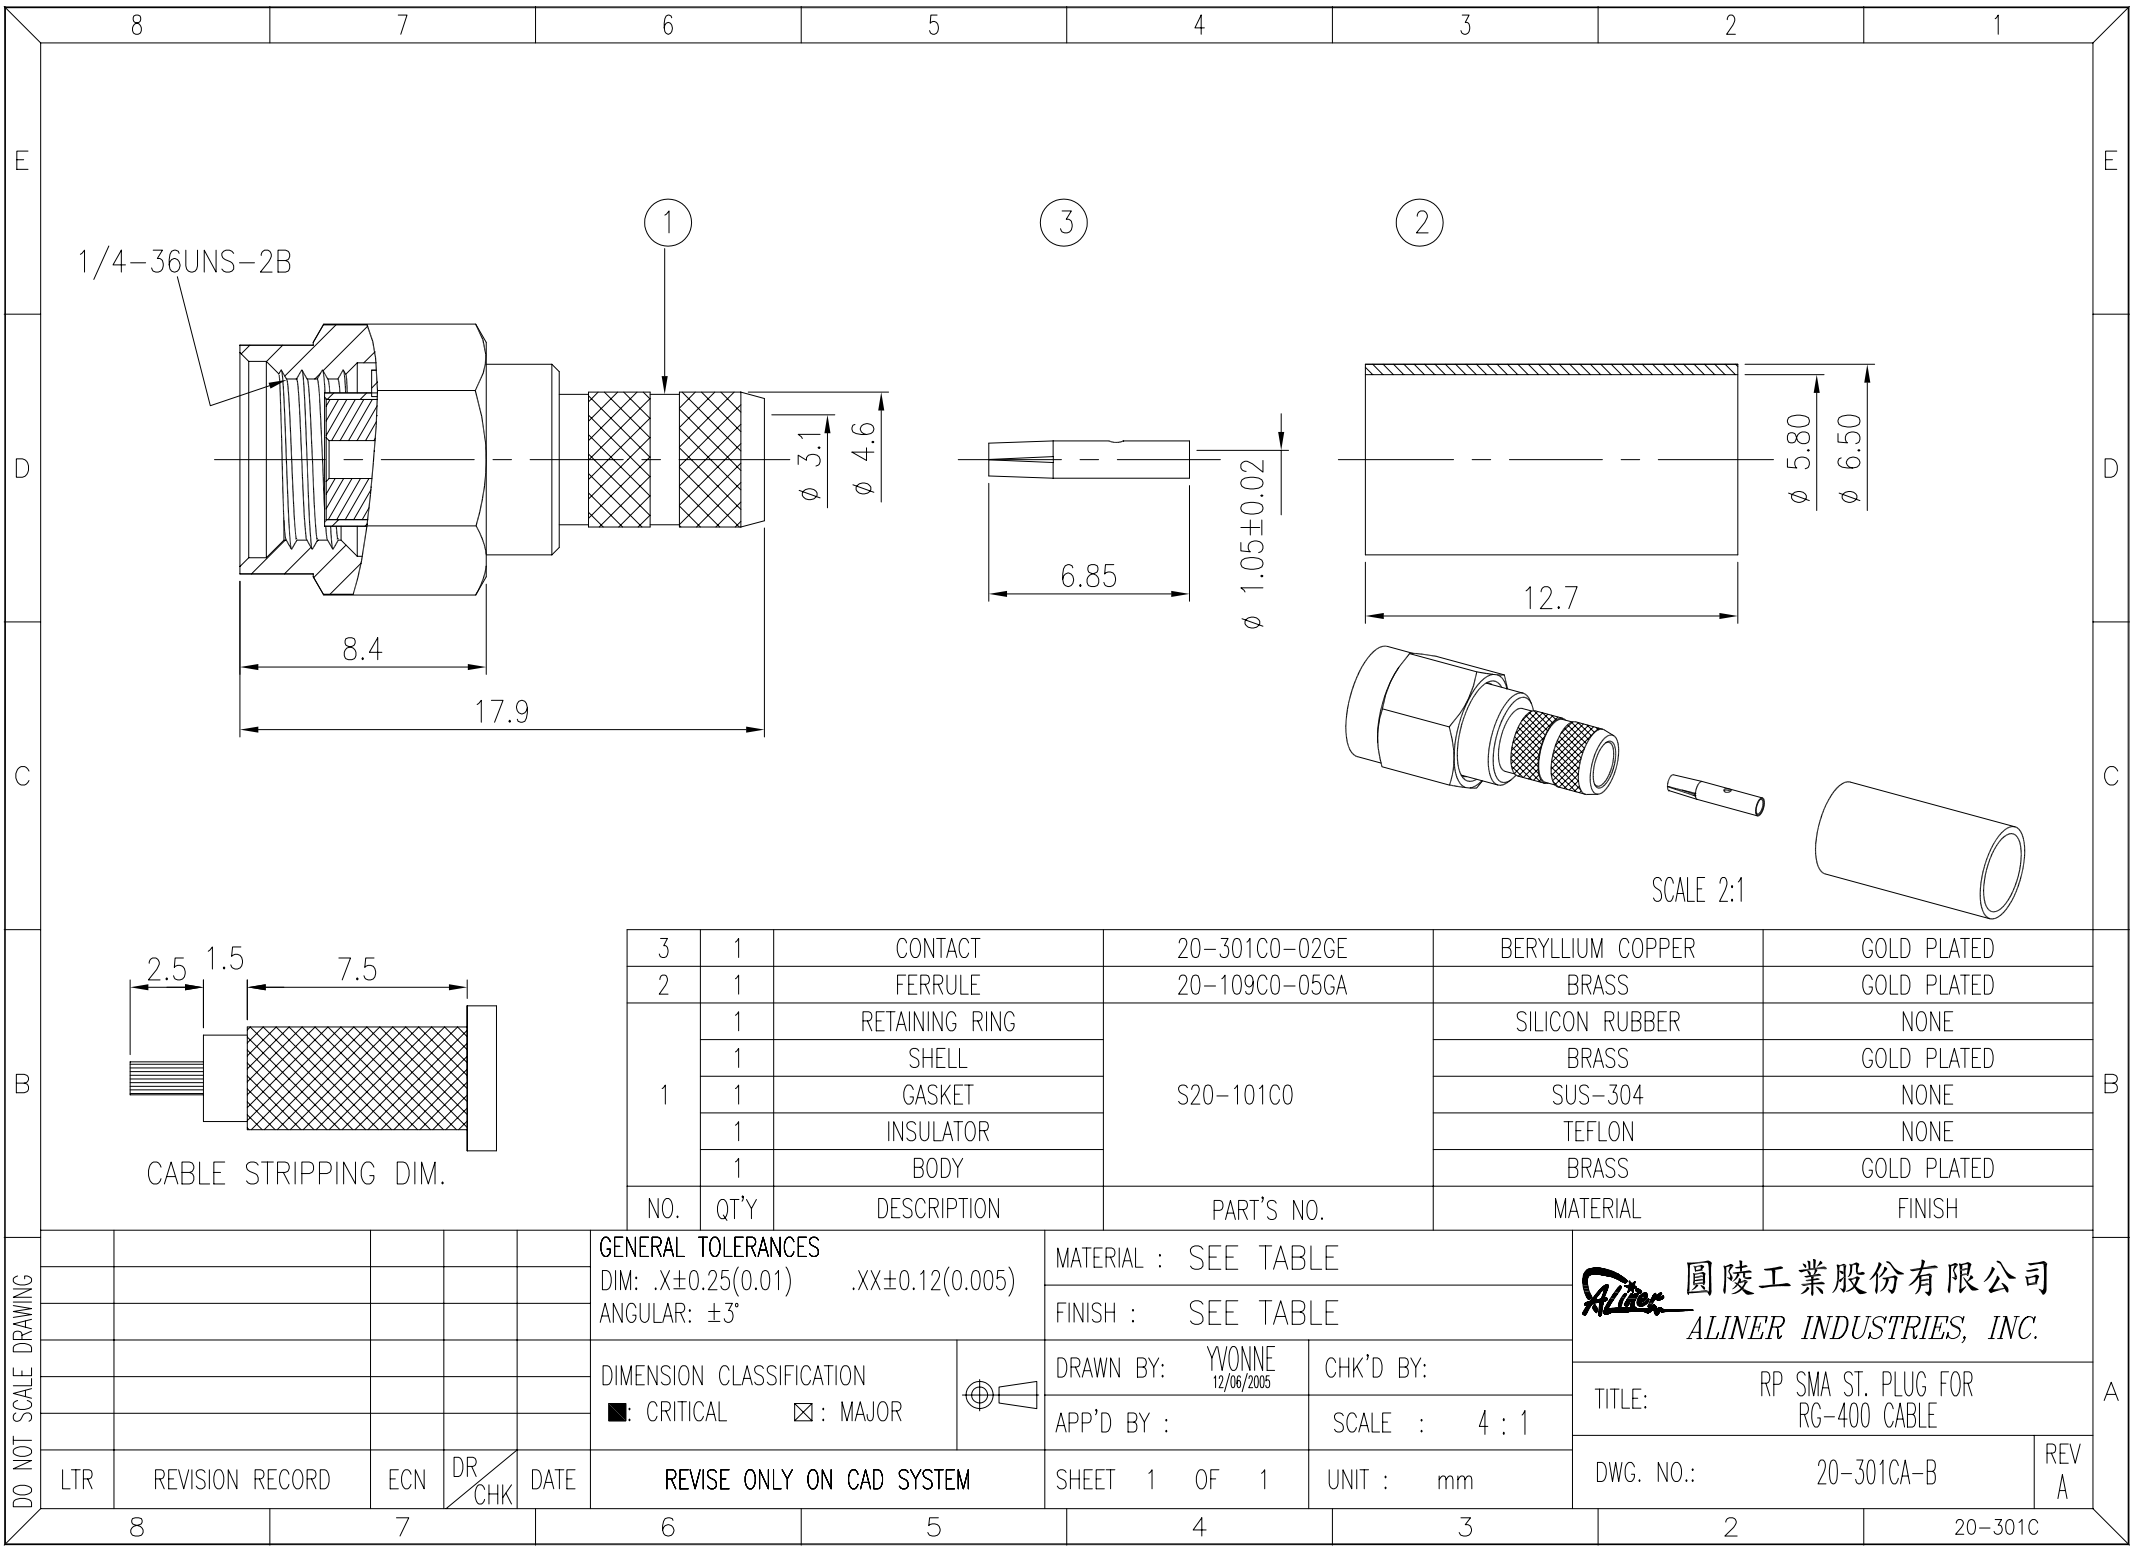

1/4-36UNS-2B

1

3

2

8.4

17.9

ø 3.1

ø 4.6

6.85

ø 1.05±0.02

12.7

ø 5.80

ø 6.50

SCALE 2:1

2.5 1.5 7.5

CABLE STRIPPING DIM.

3	1	CONTACT	20-301C0-02GE	BERYLLIUM COPPER	GOLD PLATED
2	1	FERRULE	20-109C0-05GA	BRASS	GOLD PLATED
1	1	RETAINING RING	S20-101C0	SILICON RUBBER	NONE
	1	SHELL		BRASS	GOLD PLATED
	1	GASKET		SUS-304	NONE
	1	INSULATOR		TEFLON	NONE
	1	BODY		BRASS	GOLD PLATED
NO.	QT'Y	DESCRIPTION	PART'S NO.	MATERIAL	FINISH

GENERAL TOLERANCES
DIM: .X±0.25(0.01) .XX±0.12(0.005)
ANGULAR: ±3°

DIMENSION CLASSIFICATION
■: CRITICAL ☒: MAJOR



MATERIAL : SEE TABLE

FINISH : SEE TABLE

DRAWN BY: YVONNE
12/06/2005

CHK'D BY:

APP'D BY :

SCALE : 4 : 1

SHEET 1 OF 1

UNIT : mm

ALINER 圓陵工業股份有限公司
ALINER INDUSTRIES, INC.

TITLE: RP SMA ST. PLUG FOR
RG-400 CABLE

DWG. NO.: 20-301CA-B

REV
A

LTR REVISION RECORD ECN DR/CHK DATE

REVISE ONLY ON CAD SYSTEM

8 7 6 5 4 3 2 20-301C